

Single P-channel MOSFET

ELM13419CA-S

<http://www.elm-tech.com>

■ General description

ELM13419CA-S uses advanced trench technology to provide excellent $R_{ds(on)}$, low gate charge and low gate resistance. Internal ESD protection is included.

■ Features

- $V_{ds} = -20V$
- $I_d = -3.5A$ ($V_{gs} = -10V$)
- $R_{ds(on)} < 75m\Omega$ ($V_{gs} = -10V$)
- $R_{ds(on)} < 95m\Omega$ ($V_{gs} = -4.5V$)
- $R_{ds(on)} < 145m\Omega$ ($V_{gs} = -2.5V$)
- ESD Rating : 2000V HBM

■ Maximum absolute ratings

$T_a = 25^\circ C$. Unless otherwise noted.


Parameter	Symbol	Limit	Unit	Note	
Drain-source voltage	V_{ds}	-20	V		
Gate-source voltage	V_{gs}	± 12	V		
Continuous drain current	I_d	$T_a = 25^\circ C$	-3.5	A	1
		$T_a = 70^\circ C$	-2.8		
Pulsed drain current	I_{dm}	-15	A	2	
Power dissipation	P_d	$T_c = 25^\circ C$	1.4	W	1
		$T_c = 70^\circ C$	0.9		
Junction and storage temperature range	T_j, T_{stg}	-55 to 150	$^\circ C$		

■ Thermal characteristics

Parameter	Symbol	Typ.	Max.	Unit	Note
Maximum junction-to-ambient	$R_{\theta ja}$	65	90	$^\circ C/W$	1
Maximum junction-to-ambient		85	125	$^\circ C/W$	
Maximum junction-to-lead	$R_{\theta jl}$	43	60	$^\circ C/W$	3


■ Pin configuration

SOT-23(TOP VIEW)



Pin No.	Pin name
1	GATE
2	SOURCE
3	DRAIN

■ Circuit

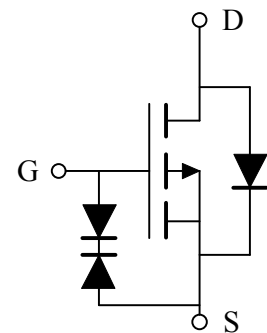

Single P-channel MOSFET

ELM13419CA-S

<http://www.elm-tech.com>

■ Electrical characteristics

Ta=25°C. Unless otherwise noted.

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
STATIC PARAMETERS						
Drain-source breakdown voltage	BV _{dss}	I _d =-250μA, V _{gs} =0V	-20			V
Zero gate voltage drain current	I _{dss}	V _{ds} =-16V			-0.5	μA
		V _{gs} =0V	Ta=55°C		-2.5	
Gate-body leakage current	I _{gss}	V _{ds} =0V, V _{gs} =±10V			±1	μA
		V _{ds} =0V, V _{gs} =±12V			±10	μA
Gate threshold voltage	V _{gs(th)}	V _{ds} =V _{gs} , I _d =-250μA	-0.7	-0.9	-1.4	V
On state drain current	I _{d(on)}	V _{gs} =-4.5V, V _{ds} =-5V	-15			A
Static drain-source on-resistance	R _{ds(on)}	V _{gs} =-10V		59	75	mΩ
		I _d =-3.5A	Ta=125°C	83	105	
		V _{gs} =-4.5V, I _d =-3A		76	95	mΩ
		V _{gs} =-2.5V, I _d =-1A		111	145	mΩ
Forward transconductance	G _{fs}	V _{ds} =-5V, I _d =-3.5A		6.8		S
Diode forward voltage	V _{sd}	I _s =-1A, V _{gs} =0V	-0.65	-0.81	-0.95	V
Max. body-diode continuous current	I _s				-2.0	A
DYNAMIC PARAMETERS						
Input capacitance	C _{iss}			512	620	pF
Output capacitance	C _{oss}	V _{gs} =0V, V _{ds} =-10V, f=1MHz		77		pF
Reverse transfer capacitance	C _{rss}			62		pF
Gate resistance	R _g	V _{gs} =0V, V _{ds} =0V, f=1MHz		9.2	13.0	Ω
SWITCHING PARAMETERS						
Total gate charge	Q _g	V _{gs} =-4.5V, V _{ds} =-10V I _d =-3.5A		5.5	6.6	nC
Gate-source charge	Q _{gs}			0.8		nC
Gate-drain charge	Q _{gd}			1.9		nC
Turn-on delay time	t _{d(on)}	V _{gs} =-10V, V _{ds} =-10V R _L =2.8Ω, R _{gen} =3Ω		5.0		ns
Turn-on rise time	t _r			6.7		ns
Turn-off delay time	t _{d(off)}			28.0		ns
Turn-off fall time	t _f			13.5		ns
Body diode reverse recovery time	t _{rr}	I _f =-3.5A, dI _f /dt=100A/μs		9.8	12.0	ns
Body diode reverse recovery charge	Q _{rr}	I _f =-3.5A, dI _f /dt=100A/μs		2.7		nC

NOTE :

1. The value of R_{θja} is measured with the device mounted on 1in² FR-4 board of 2oz. Copper, in still air environment with Ta=25°C. The value in any given applications depends on the user's specific board design, The current rating is based on the t ≤ 10s thermal resistance rating.
2. Repetitive rating, pulse width limited by junction temperature.
3. The R_{θja} is the sum of the thermal impedance from junction to lead R_{θjl} and lead to ambient.
4. The static characteristics in Figures 1 to 6 are obtained using 80μs pulses, duty cycle 0.5%max.
5. These tests are performed with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with Ta=25°C. The SOA curve provides a single pulse rating.

Single P-channel MOSFET

ELM13419CA-S

<http://www.elm-tech.com>

■ Typical electrical and thermal characteristics

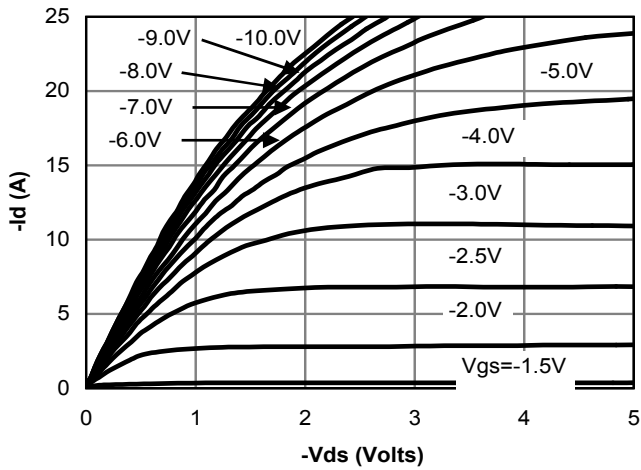


Fig 1: On-Region Characteristics

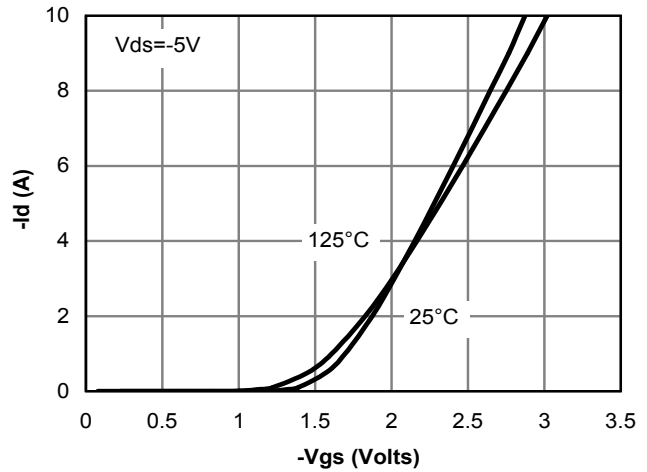


Figure 2: Transfer Characteristics

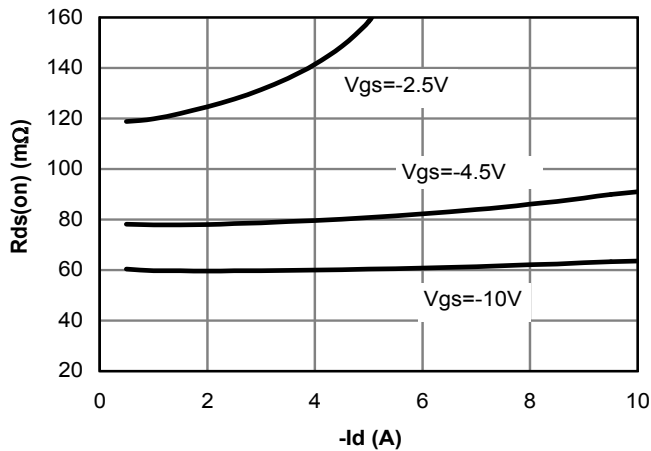


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

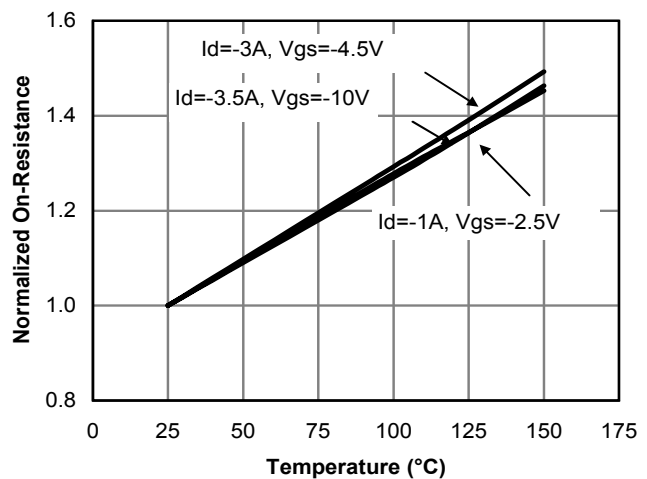


Figure 4: On-Resistance vs. Junction Temperature

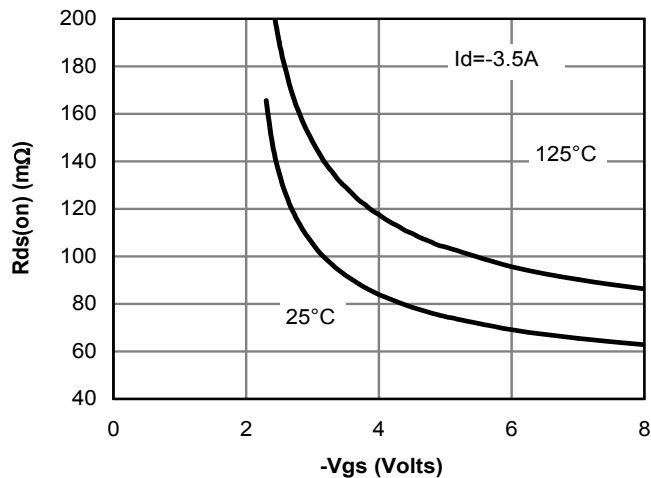


Figure 5: On-Resistance vs. Gate-Source Voltage

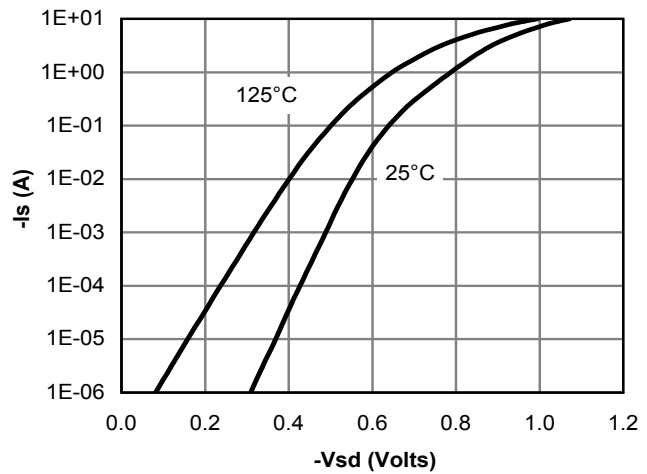


Figure 6: Body-Diode Characteristics

Single P-channel MOSFET

ELM13419CA-S

<http://www.elm-tech.com>

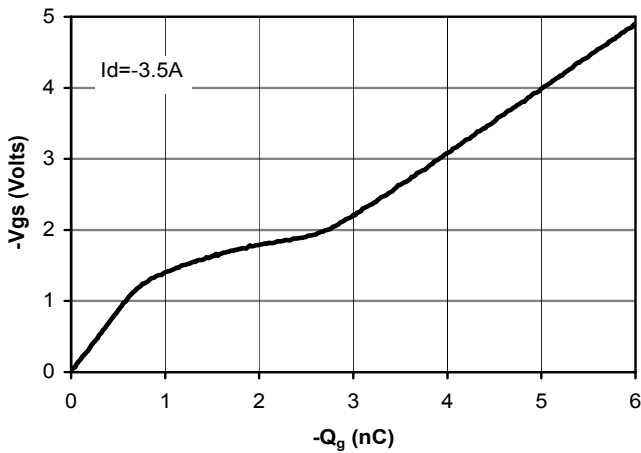


Figure 7: Gate-Charge Characteristics

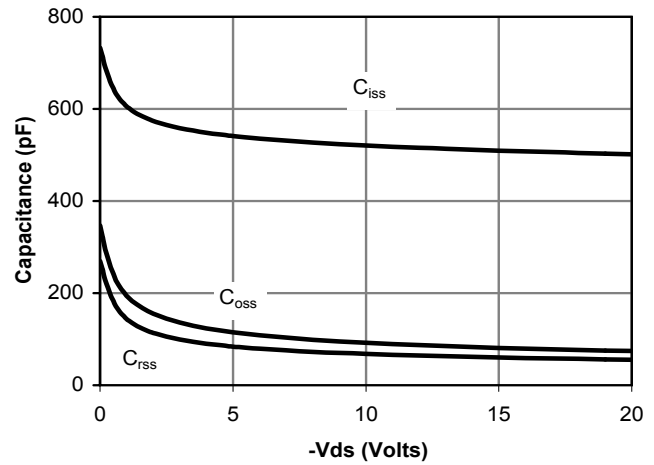


Figure 8: Capacitance Characteristics

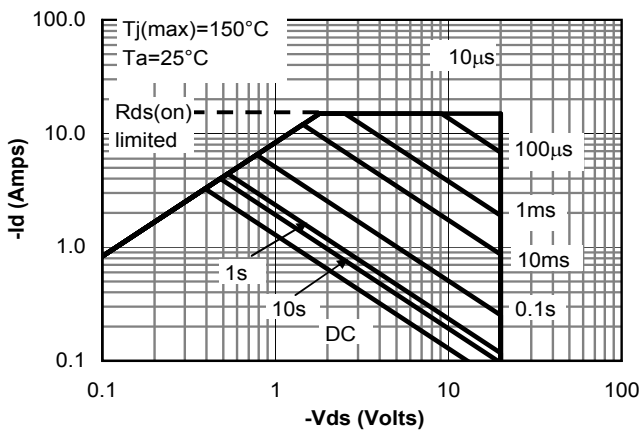


Figure 9: Maximum Forward Biased Safe Operating Area (Note 5)

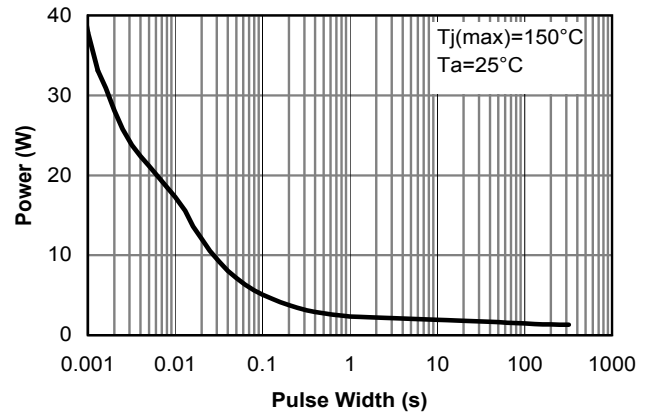


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note 5)

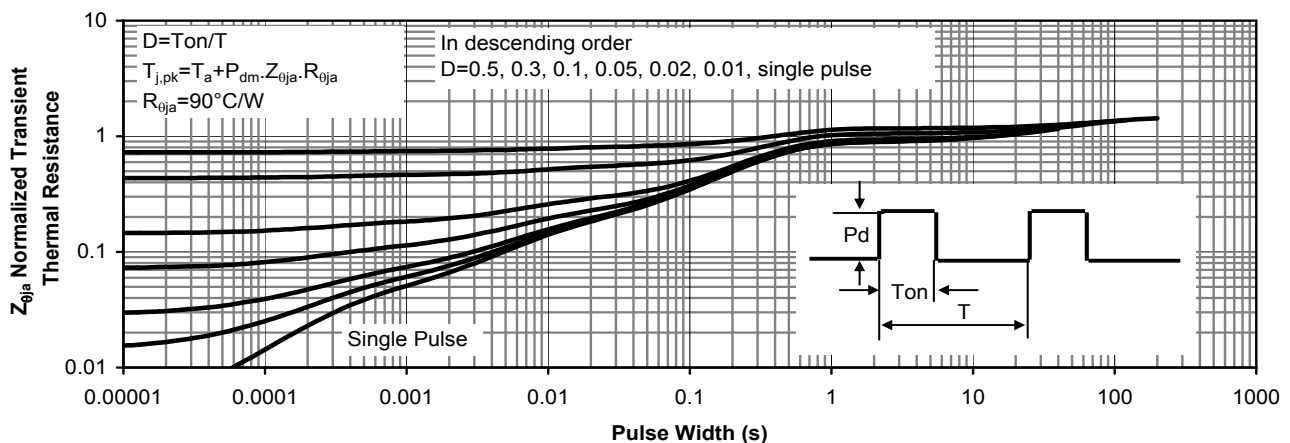


Figure 11: Normalized Maximum Transient Thermal Impedance