

Single N-channel MOSFET

ELM51306A-S

<http://www.elm-tech.com>

■ General description

ELM51306A-S uses advanced trench technology to provide excellent $R_{ds(on)}$, low gate charge and low gate threshold voltage.

■ Features

- $V_{ds}=30V$
- $I_d=1.0A$
- $R_{ds(on)} < 430m\Omega$ ($V_{gs}=4.5V$)
- $R_{ds(on)} < 580m\Omega$ ($V_{gs}=2.5V$)
- $R_{ds(on)} < 860m\Omega$ ($V_{gs}=1.8V$)

■ Maximum absolute ratings

$T_a=25^\circ C$. Unless otherwise noted.


Parameter	Symbol	Limit	Unit
Drain-source voltage	V_{ds}	30	V
Gate-source voltage	V_{gs}	± 12	V
Continuous drain current($T_j=150^\circ C$)	I_d	$T_a=25^\circ C$	1.0
		$T_a=70^\circ C$	0.6
Pulsed drain current	I_{dm}	6	A
Power dissipation	P_d	$T_c=25^\circ C$	0.35
		$T_c=70^\circ C$	0.22
Junction and storage temperature range	T_j, T_{stg}	- 55 to 150	$^\circ C$

■ Thermal characteristics

Parameter	Symbol	Typ.	Max.	Unit
Thermal resistance junction-to-ambient	$R_{\theta ja}$		120	$^\circ C/W$


■ Pin configuration

SC-70(TOP VIEW)



Pin No.	Pin name
1	GATE
2	SOURCE
3	DRAIN

■ Circuit

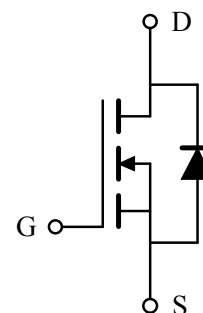

Single N-channel MOSFET

ELM51306A-S

<http://www.elm-tech.com>

■ Electrical characteristics

Ta=25°C. Unless otherwise noted.







Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
STATIC PARAMETERS						
Drain-source breakdown voltage	BVdss	Id=250μA, Vgs=0V	30			V
Zero gate voltage drain current	Idss	Vds=24V, Vgs=0V Ta=85°C			1	μA
					5	
Gate-body leakage current	Igss	Vds=0V, Vgs=±12V			±100	nA
Gate threshold voltage	Vgs(th)	Vds=Vgs, Id=250μA	0.5		1.0	V
On state drain current	Id(on)	Vgs=4.5V, Vds=5V	1.8			A
Static drain-source on-resistance	Rds(on)	Vgs=4.5V, Id=1.5A		380	430	mΩ
		Vgs=2.5V, Id=1.2A		500	580	
		Vgs=1.8V, Id=0.6A		760	860	
Forward transconductance	Gfs	Vds=10V, Id=1.0A		1		S
Diode forward voltage	Vsd	Is=1.0A, Vgs=0V		0.65	1.20	V
Max. body-diode continuous current	Is				1.0	A
DYNAMIC PARAMETERS						
Input capacitance	Ciss	Vgs=0V, Vds=15V, f=1MHz		85		pF
Output capacitance	Coss			25		pF
Reverse transfer capacitance	Crss			15		pF
SWITCHING PARAMETERS						
Total gate charge	Qg	Vgs=4.5V, Vds=15V Id=1.2A		1.4	1.8	nC
Gate-source charge	Qgs			0.3		nC
Gate-drain charge	Qgd			0.6		nC
Turn-on delay time	td(on)	Vgs=4.5V, Vds=15V RL=20Ω, Id=1.2A Rgen=1Ω		15	25	ns
Turn-on rise time	tr			25	45	ns
Turn-off delay time	td(off)			15	25	ns
Turn-off fall time	tf			10	20	ns

Single N-channel MOSFET

ELM51306A-S

<http://www.elm-tech.com>


Typical electrical and thermal characteristics

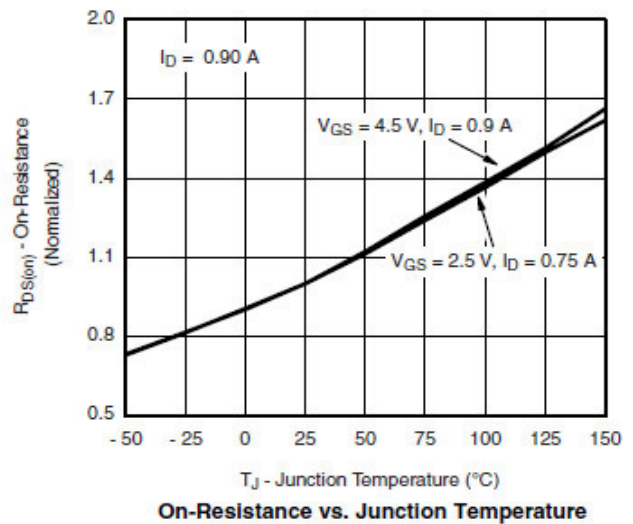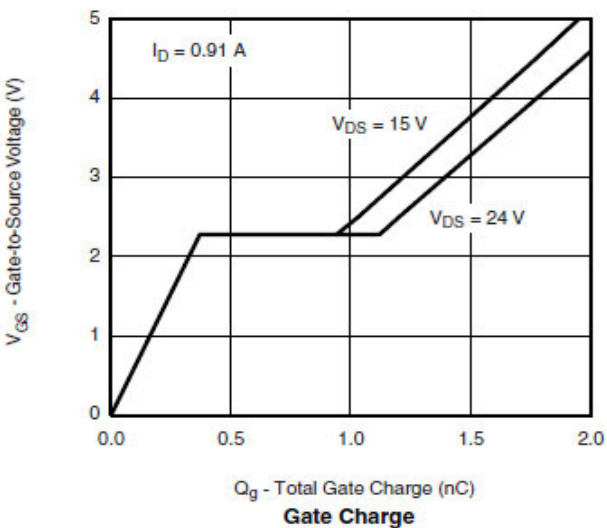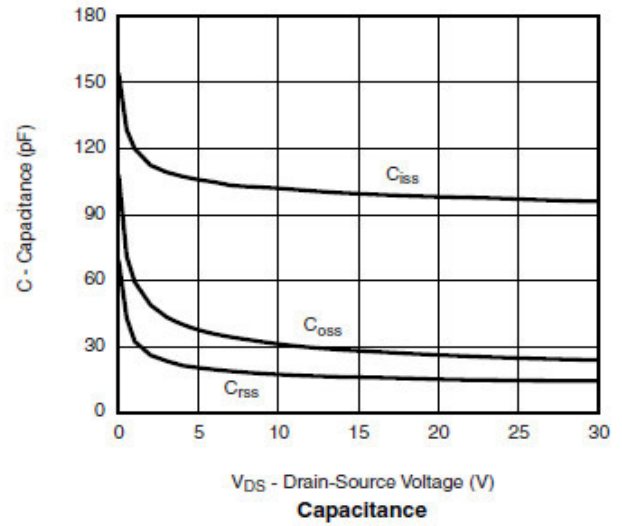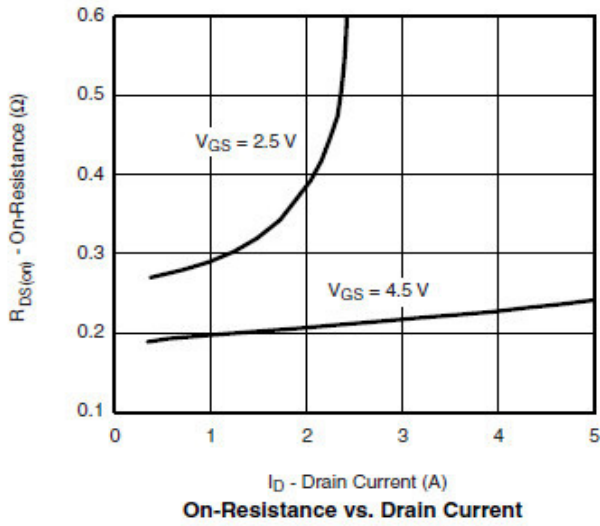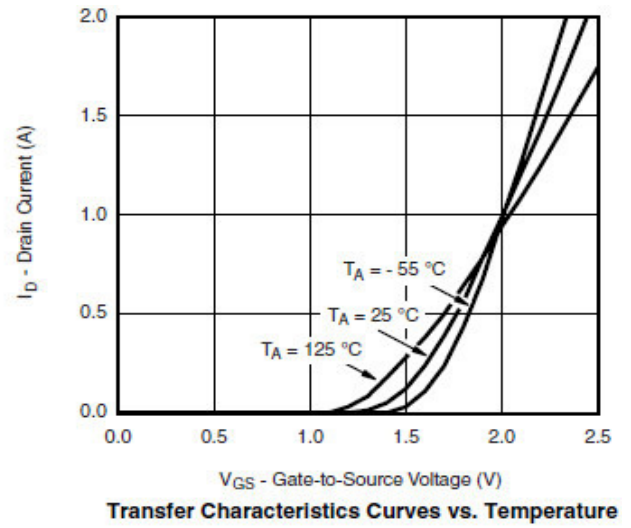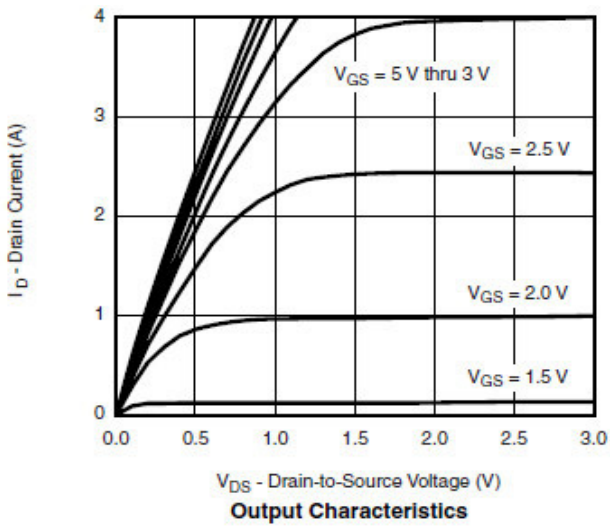


Single N-channel MOSFET

ELM51306A-S


<http://www.elm-tech.com>

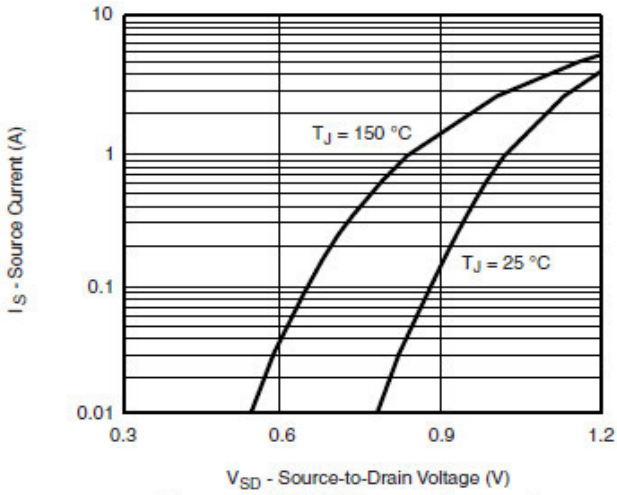


Forward Diode Voltage vs. Temperature

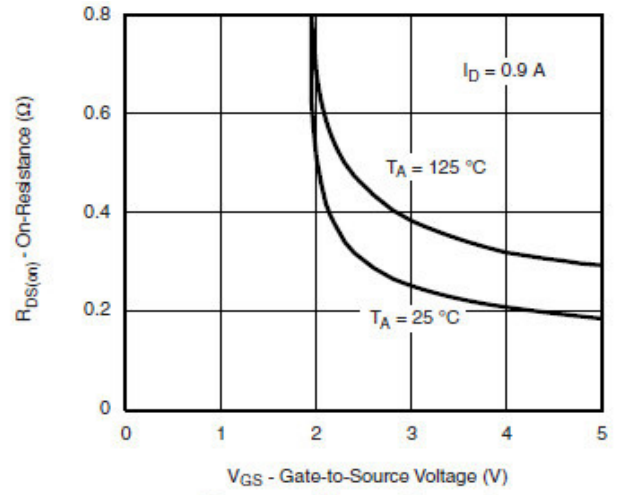


$R_{DS(on)}$ vs. V_{GS} vs. Temperature

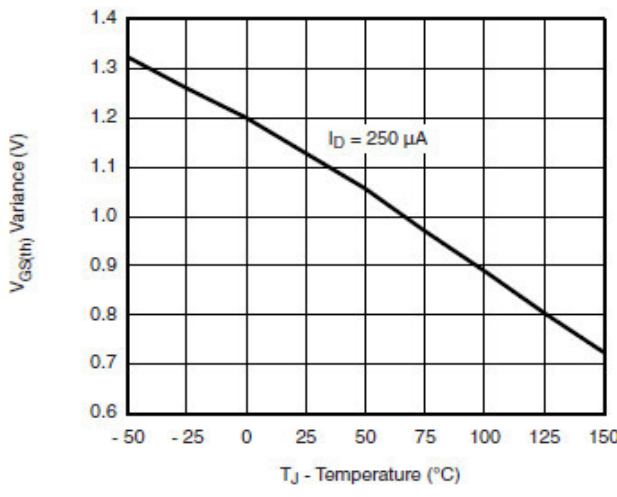

Threshold Voltage

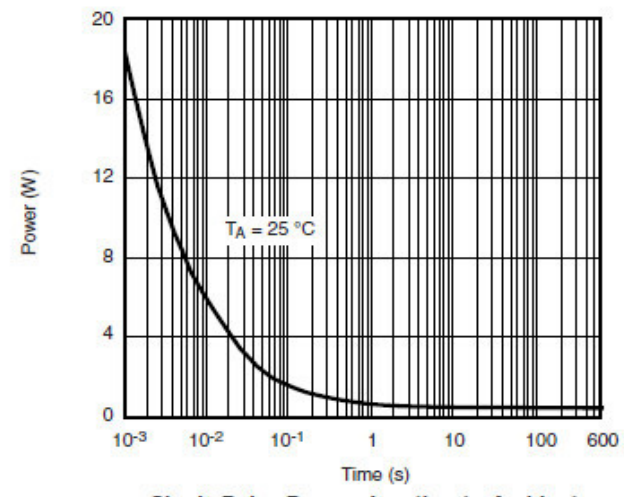

Single Pulse Power, Junction-to-Ambient

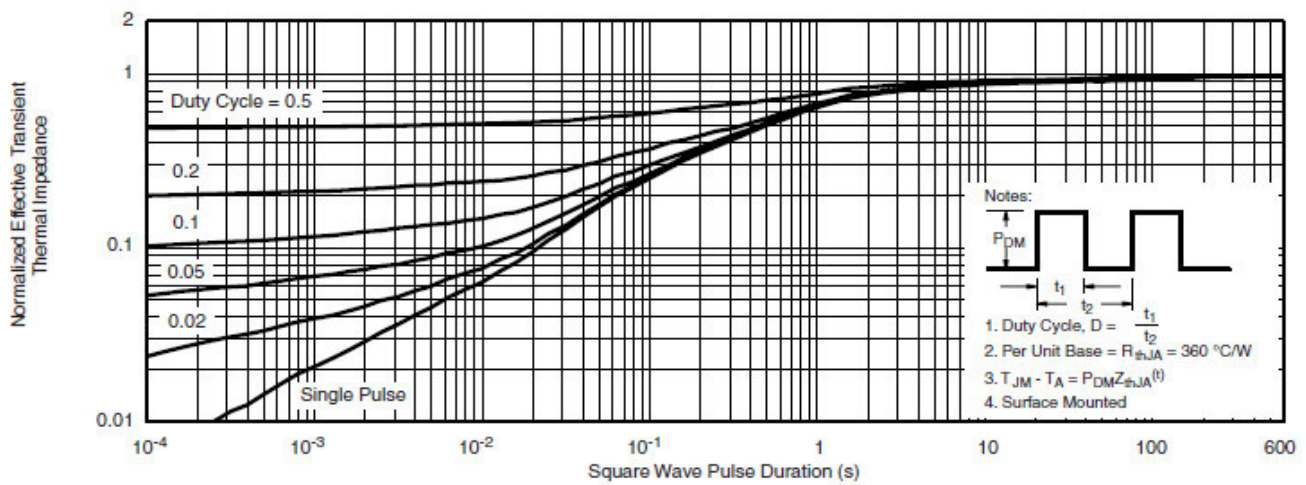






Normalized Thermal Transient Impedance, Junction-to-Ambient

- Notes:
- Duty Cycle, $D = \frac{t_1}{t_2}$
 - Per Unit Base = $R_{thJA} = 360^\circ\text{C/W}$
 - $T_{JM} - T_A = P_{DM} Z_{thJA}^{(t)}$
 - Surface Mounted

Single N-channel MOSFET

ELM51306A-S

<http://www.elm-tech.com>

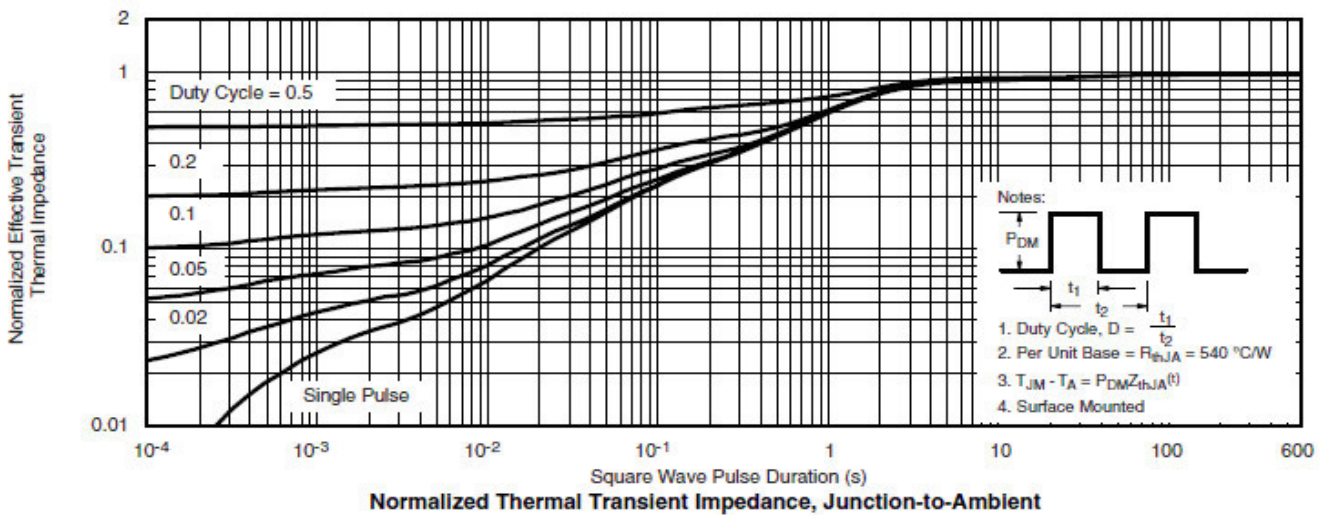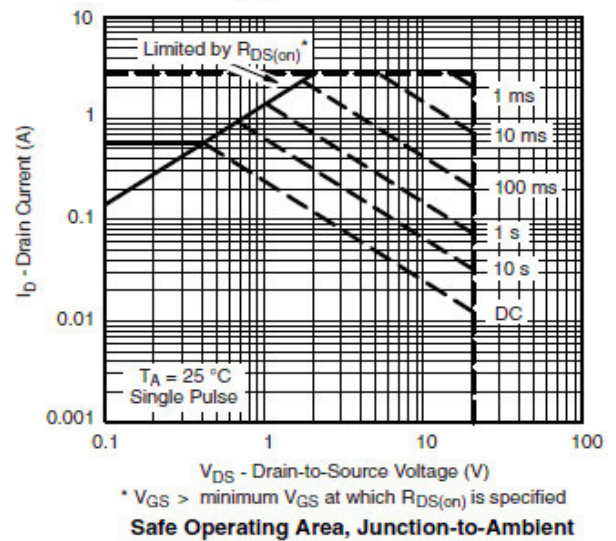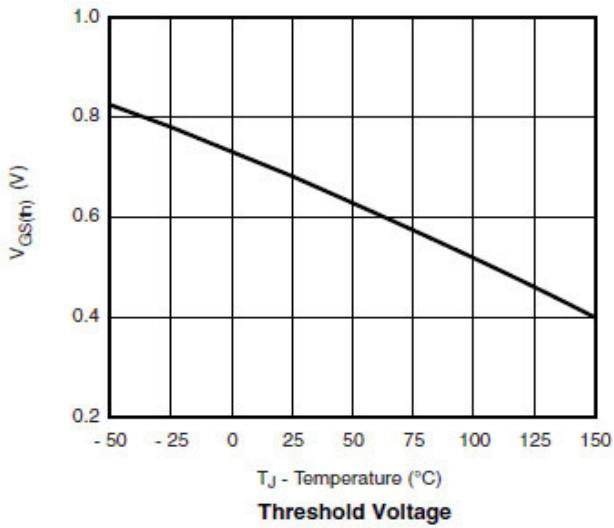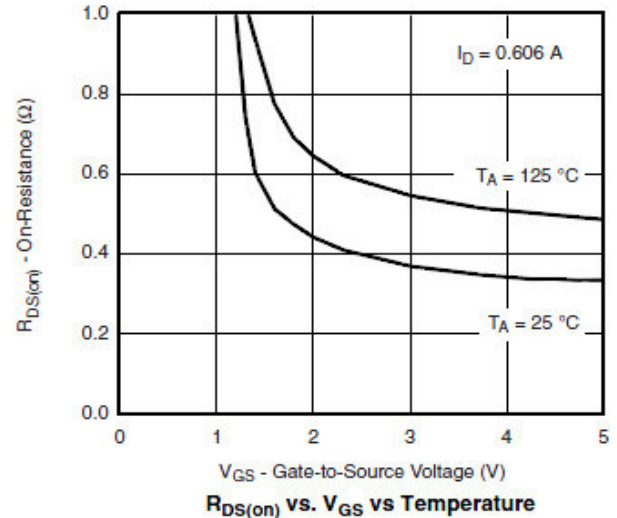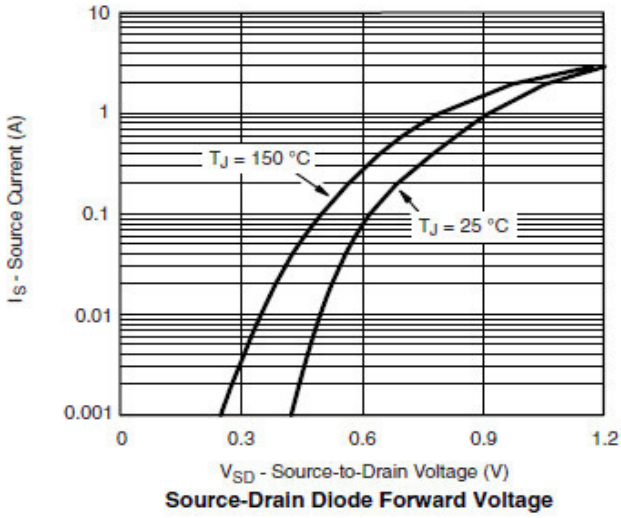


Single N-channel MOSFET

ELM51306A-S


<http://www.elm-tech.com>

■ Test circuit and waveform

Gate Charge Test Circuit & Waveform

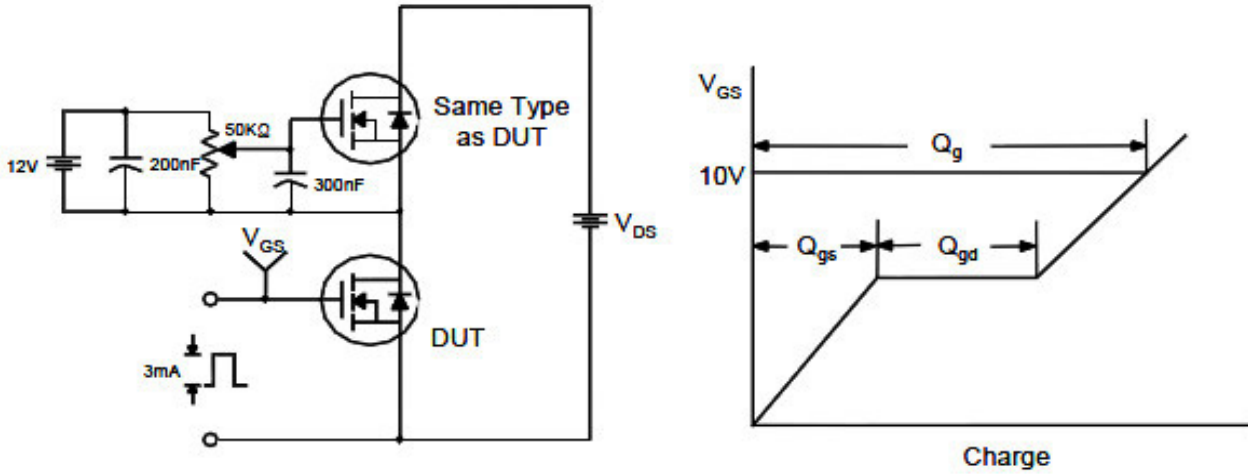

Resistive Switching Test Circuit & Waveforms

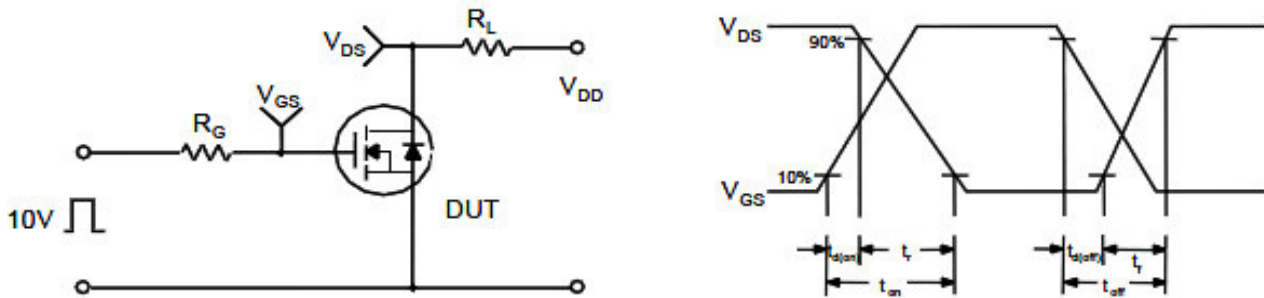

Unclamped Inductive Switching Test Circuit & Waveforms

